


## 球墨铸铁承插口单支盘三通 Ductile Iron Socket-Spigot Tee With Flanged Brance

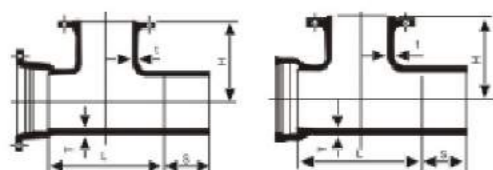

### 技术参数 SPECIFICATION

1. 测试标准/Type Test : EN14525/BS8561
2. 橡胶标准/Elastomeric : EN681-2
3. 球墨铸铁/Ductile Iron : EN1563 EN-GJS-450-10
4. 涂层标准/Coating : WIS4-52-01
5. 球墨铸铁管用管件标准/Standard : EN545/ISO2531
6. 钻孔标准/Drilling Spec : EN1092-2


### 材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile Iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

DN×dn	T	L	t	H	S	重量Mass					
						T			K		
						PN10	PN16	PN25	PN10	PN16	PN25
80×80	7.0	170	7.0	165.0	150.0	14.0	14.0	14.0	13.9	13.9	13.9
100×80	7.2	170	7.2	170.0	150.0	16.4	18.4	16.4	18.7	18.7	18.7
100×100	7.2	190	7.2	180.0	150.0	17.8	17.8	17.8	20.1	20.1	20.1
150×80	7.8	170	7.0	205.0	200.0	23.7	23.7	24.0	26.1	26.1	27
150×100	7.8	195	7.2	210.0	200.0	25.4	25.4	25.4	27.0	27.6	27.5
150×150	7.8	255	7.8	220.0	200.0	30.2	30.2	30.2	32.0	32.2	33
200×80	8.4	175	7.0	235.0	200.0	32.5	32.5	32.5	327.0	34.5	32.7
200×100	8.4	200	7.2	240.0	200.0	34.3	34.3	34.3	347.0	36.3	36.3
200×150	8.4	255	7.8	250.0	200.0	40.2	40.2	40.2	407.0	42.2	41.7
200×200	8.4	315	8.4	280.0	200.0	46.6	47.0	47.0	477.0	48.6	49.2
250×80	9.0	200	7.0	270.0	200.0	43.4	43.4	45.1	44.8	44.8	44.8
250×100	9.0	200	7.2	270.0	200.0	44.9	44.9	48.0	46.4	46.4	46.4
250×150	9.0	255	7.8	280.0	200.0	57.3	57.3	57.1	54.3	58.7	59.0
250×200	9.0	315	8.4	290.0	200.0	57.7	57.7	58.1	57.8	59.1	59.3
250×250	9.0	375	9.0	300.0	200.0	65.7	66.3	67.1	66.8	68.1	69.3
300×100	9.6	205	7.2	300.0	200.0	52.0	58.5	52.5	62.9	63.9	64
300×150	9.6	280	7.8	310.0	200.0	70.9	71.9	66.5	73.3	87.3	88.0
300×200	9.6	320	8.4	320.0	200.0	73.5	82.5	70.0	78.9	87.9	89
300×250	9.6	375	9.0	330.0	200.0	85.5	93.5	91.5	90.5	90.5	95.5
300×300	9.6	435	9.6	340.0	200.0	91.9	105.0	92.0	97.3	110.0	113
350×100	10.2	205	7.2	330.0	200.0	70.2	70.2	63.6	75.2	75.2	76.0
350×150	10.2	260	7.8	340.0	200.0	85.2	85.2	84.1	90.0	90.2	90.2
350×200	10.2	325	8.4	350.0	200.0	89.6	91.0	91.6	92.7	92.7	93.0
350×250	10.2	375	9.0	380.0	200.0	106.0	116.0	117.0	106.0	108.0	107
350×300	10.2	435	9.5	370.0	200.0	114.0	120.0	122.0	122.0	124.0	124.0
350×350	10.2	495	10.2	380.0	200.0	121.0	123.0	125.0	125.0	127.0	130
400×100	10.8	210	7.2	380.0	200.0	84.2	84.2	76.9	89.2	89.2	90.0
400×150	10.8	265	7.8	370.0	200.0	99.8	99.8	96.9	104.0	104.0	104
400×200	10.8	325	8.4	380.0	200.0	105.0	104.0	108.0	109.0	108	110.0
400×250	10.8	375	9.0	390.0	200.0	120.0	120.0	123.0	125.0	125.0	129
400×300	10.8	435	9.6	400.0	200.0	134.0	135.0	137.0	138.0	138	139.0
400×350	10.8	495	10.2	410.0	200.0	144.0	148.0	155.0	148.0	151.0	160
400×400	10.8	560	10.8	420.0	200.0	151.0	157.0	161.0	156.0	162	167.0

## 球墨铸铁全盘四通 Ductile Iron Flanged Cross



### 技术参数 SPECIFICATION

1. 测试标准/Type Test : EN14525/BS8561
2. 球墨铸铁/Ductile Iron : EN1563 EN-GJS-450-10
3. 涂层标准/Coating : WIS4-52-01
4. 球墨铸铁管用管件标准/Standard : EN545/ISO2531
5. 钻孔标准/Drilling Spec : EN1092-2

### 材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile iron
2	密封圈/Seals	EPDM/NBR

规格DIMENSIONS(PN16)

DN×dn	T	t	L	H	重量Mass PN16
80×80	8.1	8.1	330	165	20.5
100×100	8.4	8.4	360	180	25
150×150	9.1	9.1	440	220	41.1
200×200	9.8	9.8	520	260	60.9
250×250	10.5	10.5	700	350	101
300×300	11.2	11.2	800	400	143
350×350	11.9	11.9	850	425	186
400×400	12.6	12.6	900	450	234
450×450	13.3	13.3	950	475	354
500×500	14	14	1000	500	359
600×600	15.4	15.4	1100	550	521