


# 广范围单法兰接头

## Universal Flange Adaptor

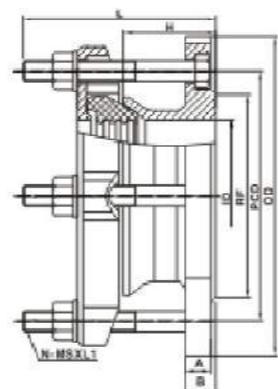

### 技术参数 SPECIFICATION

1. 测试标准/Type Test EN14525/BS8561
2. 橡胶标准/Elastomeric EN681-2
3. 球墨铸铁/Ductile Iron EN1563 EN-GJS-450-10
4. 涂层标准/Coating WIS4-52-01
5. 钻孔标准/Drilling Spec EN1092-2

### 材质 MATERIALS


序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile iron
2	密封圈/Rings	EPDM/NBR
3	紧固件/Fasteners	不锈钢/碳钢镀锌/SS/Dacromet/ZY
4	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

### 规格DIMENSIONS(PN10/PN16)

DN (mm)	范围 RANGE	EN1515-1(2000)											BS10 91962	ASA	重量 WEIGHT (KG)													
		L (mm)	H (mm)	ID (mm)	RF (mm)	PCD	OD (mm)	N-Φ (mm)	BOLT SIZE	A (mm)	B (mm)	N-MSXL1				螺栓扭矩 BOLT TORQUE(Nm)												
50	59-72	112	54	59	98	125	165	4-Φ19	M16	15	18	4-M12x100	55-65	A, D, E	125	4.9												
65	72-85	112	54	72	118	145	185	4-Φ19	M16	15	18	4-M12x100	55-65	A, D, E	125	4.9												
80	88-103	128	68	90	128	160	200	8-Φ19	M16	16	19	4-M12x115	55-65	A, D, E	125	4.9												
100	109-128	138	73	116	153	180	220	8-Φ19	M16	16	19	4-M12x125	55-65	A, D, E	125	5.8												
150-125	132-158	135	75	150	187	240	285	8-Φ19	M20	16	19	4-M12x125	55-65	A, D, E	125	7.8												
						8-Φ23																						
150	158-182	135	75	164	204	240	285	8-Φ23	M20	16	19	4-M12x125	55-65	A, D, E	125	7.8												
200	189-212	138	75	202	266	295	340	8-Φ23	M20	17	20	4-M12x125	55-65	A, D, E	125	11												
								8-Φ19																				
250	218-235	138	75	218	266	295	340	12-Φ23	M20	17	20	4-M12x125	55-65	E	125	11												
								8-Φ23																				
300	242-262	148	85	256	318	355	405	12-Φ23	M24	19	22	6-M12x135	55-65	DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.														
						350																						
350	272-289	148	85	272	318	355	405	12-Φ28	M24	19	22	6-M12x135	55-65				DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.											
						350																						
350	315-349	168	100	333	370	410	460	12-Φ28	M24	20	23	6-M12x160	55-65							DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.								
						400																						
350	322-339	168	100	322	367	410	460	12-Φ28	M24	20	23	6-M12x150	55-65										DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.					
						400																						
350	338-360	226	158	322	367	410	460	12-Φ28	M24	20	23	6-M12x210	55-65													DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.		
						400																						
350	351-391	196	128	355	430	470	520	16-Φ28	M24	26	22	8-M12x210	55-65	DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.		16.3												
						460																						
400	400-442	198	130	404	480	525	580	16-Φ31	M27	27	23	8-M12x210	55-65				DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.		20									
						515																						
450	455-493	200	130	454	532	576	640	20-Φ31	M27	29	25	10-M12x210	55-65							DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.		24.5						
						565																						
500	500-599	200	130	504	583	650	715	20-Φ34	M30	30.5	26.5	10-M12x210	55-65										DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.		28.2			
						620																						
600	600-692	206	135	604	686	770	840	20-Φ37	M33	34	30	10-M12x210	55-65													DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.		29.0
						725																						
700	708-780	206	135	705	794	840	910	24-Φ37	M33	39.5	34.5	10-M12x210	55-65	DIMENSIONS, WEIGHTS & TECHNICAL DATA FOR ALTERNATIVE FLANGE DRILLINGS IS AVAILABLE ON REQUEST.		31.0												
						840																						

# 广范围柔性接头

## Universal Straight Coupling

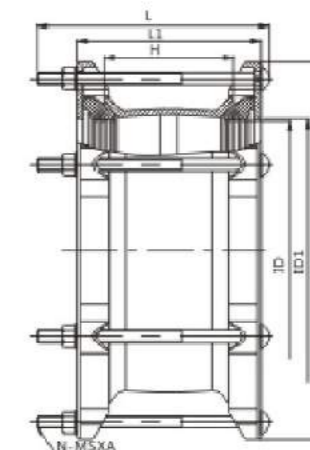

### 技术参数 SPECIFICATION

1. 测试标准/Type Test EN14525/BS8561
2. 橡胶标准/Elastomeric EN681-2
3. 球墨铸铁/Ductile Iron EN1563 EN-GJS-450-10
4. 涂层标准/Coating WIS4-52-01
5. 钻孔标准/Drilling Spec EN1092-1

### 材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile iron
2	压盖/Gland	球墨铸铁/Ductile iron
3	密封圈/Seals	EPDM/NBR
4	紧固件/Fasteners	不锈钢/碳钢镀锌/SS/Dacromet/ZY
5	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

### 规格DIMENSIONS(PN10/PN16)

DN (mm)	范围 RANGE	L (mm)	L1 (mm)	H (mm)	ID (mm)	ID1 (mm)	OD (mm)	N-MSXA (mm)	螺栓扭矩 BOLT TORQUE(Nm)	重量 WEIGHT(kg)
50	59-72	188	148	95	72	76	153	4-M12x180	55-65	4.1
65	72-85	188	148	95	85	89	173	4-M12x180	55-65	4.1
80	88-103	188	146	95	103	107	185	4-M12x180	55-65	4.1
100	109-128	188	146	95	127	132	208	4-M12x180	55-65	4.6
125	138-153	198	153	95	158	162	256	4-M12x190	55-65	8.3
150	159-182	198	153	95	182	186	280	4-M12x190	55-65	8.5
175	189-212	233	187	130	211	216	329	4-M12x225	55-65	9
200	218-235	233	187	130	234	239	333	4-M12x225	55-65	10.6
225	242-262	233	185	130	261	265	379	6-M12x225	55-65	14.5
250	272-289	233	186	130	288	295	391	6-M12x225	55-65	15.4
300	315-349	233	187	130	349	352	464	6-M12x225	55-65	20.0
	322-339	233	187	130	338	345	444	6-M12x225	55-65	23.1
	338-360	233	187	130	359	366	460	6-M12x225	55-65	23.1
350	351-391	250	187	130	390	395	502	10-M12x225	55-65	26.8
400	400-442	250	187	130	441	446	558	10-M12x225	55-65	31.9
450	455-493	250	187	130	492	497	608	10-M12x225	55-65	36.6
500	500-599	250	187	130	598	594	662	10-M12x225	55-65	40.0
600	600-692	250	187	130	691	697	768	10-M12x225	55-65	42.0
700	708-780	250	187	130	779	785	910	10-M12x225	55-65	45.0