

MOPVC承口管堵

Mopvc End Cap




技术参数 SPECIFICATION

- 1.测试标准/Type Test : EN14525/BS8561
- 2.橡胶标准/Elastomeric : EN681-2
- 3.球墨铸铁/Ductile Iron : EN1563 EN-GJS-450-10
- 4.涂层标准/Coating : WIS4-52-01
- 5.PVC管用管件标准/Standard : EN12842

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

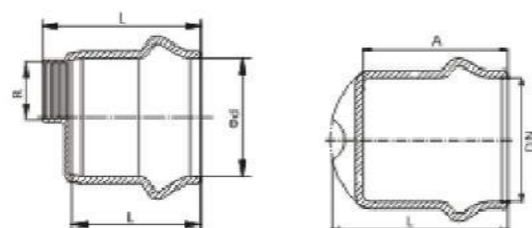

承口管堵带螺纹连接
Caps threaded branch

管堵 Caps

规格DIMENSIONS(PN16)			
Φd	A	L	P/kg
50	80	100	0.7
63	90	110	1.3
75	90	115	1.7
90	100	125	2.2
110	110	135	3.1
125	115	145	4.5
140	120	150	4.9
160	130	160	6.5
200	140	175	9.2
225	150	185	12
250	160	195	15.6
280	170	205	22
315	185	220	24.7

规格DIMENSIONS(PN16)				
Φd	R	A	L	P/kg
50	1"	110	90	1.1
63	1"	115	95	1.5
75	1"	125	100	2
90	1"	130	105	2.7
110	2"	140	115	3.5
125	2"	165	125	4.2
140	2"	160	130	5
160	2"	175	145	6
180	2"	190	155	7.5
200	2"	190	155	9
225	2"	190	155	11
250	2"	205	175	14.4
280	2"	225	185	17.6
315	2"	225	190	20.7

MOPVC全承口四通

Mopvc Socket Cross




技术参数 SPECIFICATION

- 1.测试标准/Type Test : EN14525/BS8561
- 2.橡胶标准/Elastomeric : EN681-2
- 3.球墨铸铁/Ductile Iron : EN1563 EN-GJS-450-10
- 4.涂层标准/Coating : WIS4-52-01
- 5.PVC管用管件标准/Standard : EN12842

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

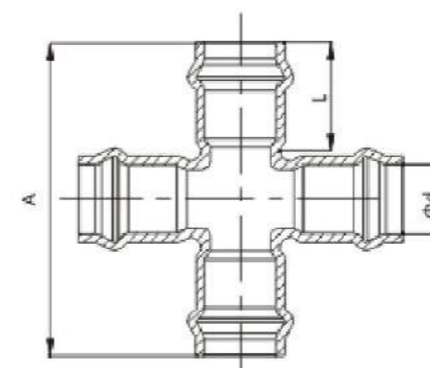

规格DIMENSIONS(PN16)			
Φd	A	L	P/kg
75	305	95	6
90	340	100	8.5
110	380	105	9.9
160	450	135	23.3
200	588	150	43
250	624	170	46.3
315	700	190	68