


# MOPVC 全承口三通

Mopvc All Socket Tee



## 技术参数 SPECIFICATION

- 1.测试标准/Type Test : EN14525/BS8561
- 2.橡胶标准/Elastomeric : EN681-2
- 3.球墨铸铁/Ductile Iron : EN1563 EN-GJS-450-10
- 4.涂层标准/Coating : WIS4-52-01
- 5.PVC管用管件标准/Standard : EN12842

## 材质 MATERIALS


序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENTIONS(PN16)							
规格SIZE	$\Phi d_1$	$\Phi d_2$	A	H	L1	L2	P/kg
50/50	50	50	220	110	95	95	2.2
63/50	63	50	245	125	95	90	3.8
63/63	63	63	250	120	95	95	3.8
75/50	75	50	250	130	95	95	4.2
75/63	75	63	250	135	95	95	4.5
75/75	75	75	265	135	95	95	5.2
90/63	90	63	275	140	105	95	5.9
90/75	90	75	290	140	105	100	6.5
90/90	90	90	305	150	105	105	7.7
110/63	110	63	295	150	115	95	7.6
110/75	110	75	310	150	115	100	8.3
110/90	110	90	325	160	115	105	8.8
110/110	110	110	345	170	115	115	10
125/63	125	63	305	160	125	95	7.7
125/75	125	75	320	160	125	100	10.1
125/90	125	90	335	170	125	105	8.8
125/110	125	110	355	180	125	115	9.1
125/125	125	125	380	185	125	125	12.1
140/63	140	63	315	165	130	95	10
140/75	140	75	330	165	130	100	10.4
140/90	140	90	345	175	130	105	11
140/110	140	110	365	185	130	115	10.8
140/125	140	125	370	205	130	125	12.7
140/140	140	140	390	195	130	130	13.3
160/63	160	63	335	175	145	95	14
160/75	160	75	350	175	145	100	11.2
160/90	160	90	365	185	145	105	15.6
160/110	160	110	385	195	145	115	16.3
160/125	160	125	385	200	145	125	13.8
160/140	160	140	410	205	145	130	15
160/160	160	160	435	215	145	145	21
200/75	200	75	390	210	155	100	16.2
200/90	200	90	420	205	155	105	18.5
200/110	200	110	440	215	155	115	21
200/125	200	125	440	220	155	125	18.6
200/140	200	140	465	225	155	130	26.5
200/160	200	160	490	235	155	145	30
200/180	200	180	510	260	155	155	31

规格DIMENTIONS(PN16)							
规格SIZE	$\Phi d_1$	$\Phi d_2$	A	H	L1	L2	P/kg
200/200	200	200	520	245	155	155	33
225/75	225	75	400	205	155	100	27.5
225/90	225	90	440	220	155	105	28
225/110	225	110	460	230	155	115	29
225/140	255	140	455	240	155	130	30
225/160	255	160	510	250	155	145	32
225/180	255	180	490	275	155	155	34
225/200	225	200	520	270	175	155	35
225/225	225	225	560	270	175	155	37.5
250/90	250	90	475	230	175	105	28.6
250/110	250	110	495	240	175	115	26.5
250/140	250	140	510	260	175	130	36.2
250/160	250	160	545	260	175	145	36.5
250/200	250	200	570	270	175	155	38.5
250/250	250	250	620	290	175	175	43
280/90	280	90	495	245	185	105	36
280/110	280	110	515	255	185	115	38
280/160	280	160	565	275	185	145	44
280/225	280	225	620	300	185	155	50
280/250	280	250	665	315	185	185	55
280/280	280	280	665	315	185	185	58
315/90	315	90	480	265	190	105	32.6
315/110	315	110	545	275	190	115	37.3
315/140	315	140	540	290	190	130	42.5
315/160	315	160	595	295	190	145	52
315/200	315	200	620	305	190	155	59
315/225	315	225	610	345	190	175	61
315/250	315	250	670	325	190	175	63
315/280	315	280	665	355	190	185	64.2
315/315	315	315	745	350	190	190	74
355/110	355	110	570	290	205	115	49.3
355/160	355	160	600	315	205	145	53.9
355/200	355	200	630	340	205	155	58.9
355/315	355	315	740	385	205	190	70.1
355/355	355	355	780	390	205	205	75.1
400/200	400	200	680	370	230	155	71
400/315	400	315	790	410	230	190	83.6
400/400	400	400	880	440	230	230	95.7

# MOPVC 双承口单支盘三通

Mopvc Double Socket Tee With Flange Branch

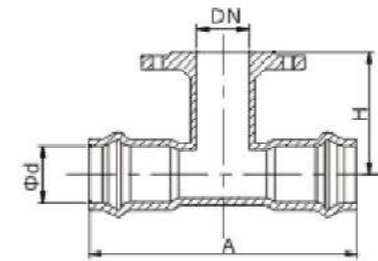

## 技术参数 SPECIFICATION

- 1.测试标准/Type Test : EN14525/BS8561
- 2.橡胶标准/Elastomeric : EN681-2
- 3.球墨铸铁/Ductile Iron : EN1563 EN-GJS-450-10
- 4.涂层标准/Coating : WIS4-52-01
- 5.PVC管用管件标准/Standard : EN12842
- 6.钻孔标准/Drilling Spec : EN1092-2

## 材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile iron
2	密封圈/Seals	EPDM/NBR
3	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

规格DIMENTIONS(PN16)						规格DIMENTIONS(PN16)					
SIZE	DN	$\Phi d$	A	H	P/kg	SIZE	DN	$\Phi d$	A	H	P/kg
50/40	40	50	240	90	4.6	200/125	125	200	465	240	28.4
63/40	40	63	250	140	4.7	200/150	150	200	490	245	34
63/50	50	63	250	140	6.5	200/200	200	200	540	250	36.5
63/60	60	63	250	140	5.8	225/60	60	225	425	215	24.6
63/65	65	63	250	140	6.5	225/80	80	225	440	225	26.5
75/40	40	75	240	130	6.5	225/100	100	225	460	230	27.8
75/50	50	75	250	140	6.4	225/125	125	225	485	240	28.4
75/60	60	75	265	140	7.7	225/150	150	225	510	245	35
75/65	65	75	265	140	7.6	225/200	200	225	560	260	33.9
75/80	80	75	265	140	10	250/60	60	250	460	250	33.1
90/40	40	90	265	135	7.6	250/80	80	250	475	250	35.1
90/50	50	90	275	145	8.6	250/100	100	250	495	255	42.2
90/60	60	90	290	155	9.4	250/125	125	250	520	260	36.4
90/80	80	90	305	160	11	250/150	150	250	545	265	46
110/40	40	110	285	145	9.4	250/200	200	250	595	275	55.6
110/50	50	110	295	145	9.9	250/250	250	250	645	285	57.4
110/60	60	110	310	165	10.5	280/80	80	280	470	280	32
110/65	65	110	310	165	10.7	280/100	100	280	490	290	36.5
110/80	80	110	325	170	12.2	280/150	150	280	540	285	41
110/100	100	110	345	170	14.9	280/200	200	280	590	290	62.1
125/40	40	125	295	160	12.2	280/250	250	280	640	305	73.2
125/50	50	125	330	160	13	315/80	80	315	525	295	59.5
125/60	60	125	320	160	13.5	315/100	100	315	545	300	61
125/80	80	125	335	170	14.4	315/150	150	315	595	310	64
125/100	100	125	355	180	17.8	315/200	200	315	645	310	70.8
125/125	125	125	380	180	19.3	315/250	250	315	695	310	73
140/40	40	140	305	160	13.2	315/300	300	315	745	310	81.3
140/50	50	140	320	160	13.5	355/80	80	355	550	305	51.2
140/60	60	140	330	180	14.2	355/100	100	355	570	310	53.9
140/65	65	140	335	200	14.3	355/150	150	355	620	330	61.6
140/80	80	140	345	185	14.5	355/200	200	355	670	330	69.9
140/100	100	140	365	195	14.7	355/250	250	355	720	330	79.2
140/125	125	140	390	200	19	355/300	300	355	770	330	85.8
160/40	40	160	325	170	17.1	355/350	300	355	820	350	119.7
160/50	50	160	360	200	17.2	400/80	80	400	580	350	70
160/60	60	160	350	190	17.4	400/100	100	400	580	350	75.6
160/65	65	160	365	215	17.5	400/150	150	400	630	350	92
160/80	80	160	365	200	17.8	400/200	200	400	680	350	95
160/100	100	160	385	205	18.7	400/250	250	400	720	350	109.5
160/125	125	160	410	210	19	400/300	300	400	780	350	123.5
180/60	60	180	410	210	17.3	400/400	400	400	880	360	162
180/100	100	180	450	210	20.5	450/80	80	450	560	340	64.4
180/150	150	180	500	220	26	450/100	100	450	580	355	67.7
180/200	200	180	550	240	31.6	450/150	150	450	630	360	77
200/40	40	200	380	195	20.8	450/200	200	450	680	365	84.2
200/50	50	200	390	195	21.7	450/250	250	450	730	365	84.2
200/60	60	200	405	215	22	450/300	300	4			