

不锈钢单开管道修补器

Stainless Steel Single Band Repair Cimap




技术参数 SPECIFICATION

1. 测试标准/Type Test : EN14525
 2. 橡胶标准/Elastomeric : EN681-2
 BS1449-304S15-2B
 BSEN ISO898-1
 BS4190-4

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	SS304
2	齿板/Jaws	SS304
3	密封垫片/Seals	EPDM/NBR
4	紧固件/Fasteners	SS304

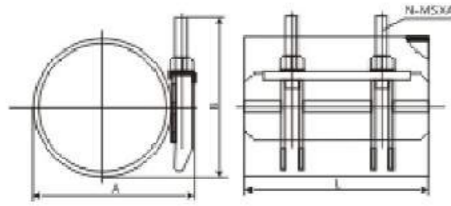

规格DIMENSIONS (PN 10/PN 16)

管道外径范围OD RANGE		L		A	B	N-MSXA(mm)			重量	
最小MIN	最大MAX	(mm)	(mm)	(mm)	(mm)	200	300	400	WEIGHT(kg)	
87	96	200	300	400	124	183	2-M16x175	3-M16x175	4-M16x175	1.79
95	105	200	300	400	133	188	2-M16x175	3-M16x175	4-M16x175	1.95
102	112	200	300	400	140	191	2-M16x175	3-M16x175	4-M16x175	2.01
113	123	200	300	400	151	197	2-M16x175	3-M16x175	4-M16x175	2.18
120	130	200	300	400	158	200	2-M16x175	3-M16x175	4-M16x175	2.30
132	142	200	300	400	170	206	2-M16x175	3-M16x175	4-M16x175	2.39
135	145	200	300	400	173	208	2-M16x175	3-M16x175	4-M16x175	2.41
147	157	200	300	400	185	214	2-M16x175	3-M16x175	4-M16x175	2.51
151	161	200	300	400	189	216	2-M16x175	3-M16x175	4-M16x175	2.51
160	170	200	300	400	198	220	2-M16x175	3-M16x175	4-M16x175	2.63
167	178	200	300	400	206	224	2-M16x175	3-M16x175	4-M16x175	2.68
176	187	200	300	400	215	229	3-M16x175	4-M16x175	6-M16x175	2.75
186	196	200	300	400	224	233	3-M16x175	4-M16x175	6-M16x175	2.94
193	203	200	300	400	231	237	3-M16x175	4-M16x175	6-M16x175	2.89
200	210	200	300	400	238	240	3-M16x175	4-M16x175	6-M16x175	3.17
215	225	200	300	400	252	248	3-M16x175	4-M16x175	6-M16x175	3.30
219	229	200	300	400	257	250	3-M16x175	4-M16x175	6-M16x175	3.33
230	240	300	400	268	255		4-M16x175	6-M16x175	8-M16x175	5.10
237	247	300	400	275	259		4-M16x175	6-M16x175	8-M16x175	5.35
240	250	300	400	278	260		4-M16x175	6-M16x175	8-M16x175	5.38
250	260	300	400	288	265		4-M16x175	6-M16x175	8-M16x175	5.51
257	267	300	400	295	269		4-M16x175	6-M16x175	8-M16x175	5.61
261	271	300	400	299	271		4-M16x175	6-M16x175	8-M16x175	5.67
270	280	300	400	308	280		4-M16x175	6-M16x175	8-M16x175	5.79
280	291	300	400	319	291		4-M16x175	6-M16x175	8-M16x175	5.92
290	300	300	400	328	300		4-M16x175	6-M16x175	8-M16x175	6.05
300	310	300	400	338	310		4-M16x175	6-M16x175	8-M16x175	6.18
310	320	300	400	348	320		4-M16x175	6-M16x175	8-M16x175	6.31
315	325	300	400	353	325		4-M16x175	6-M16x175	8-M16x175	6.39
320	330	300	400	358	330		4-M16x175	6-M16x175	8-M16x175	6.45
330	340	300	400	368	340		4-M16x175	6-M16x175	8-M16x175	6.59
340	350	300	400	378	350		4-M16x175	6-M16x175	8-M16x175	6.72
350	360	300	400	388	360		4-M16x175	6-M16x175	8-M16x175	6.85

不锈钢双开管道修补器

Stainless Steel Double Band Repair Clamp




技术参数 SPECIFICATION

1. 测试标准/Type Test : EN14525
 2. 橡胶标准/Elastomeric : EN681-2
 BS1449-304S15-2B
 BSEN ISO898-1
 BS4190-4

材质 MATERIALS

序号 ITEM	部件名称 PARTS	材质 MATERIAL
1	本体/Body	球墨铸铁/Ductile iron
2	密封圈/Seals	EPDM/NBR
3	紧固件/Fasteners	不锈钢/碳钢达克罗/碳钢镀锌 SS/Dacromet/ZY
4	涂层/Coating	环氧树脂粉末/Fusion Bonded Epoxy

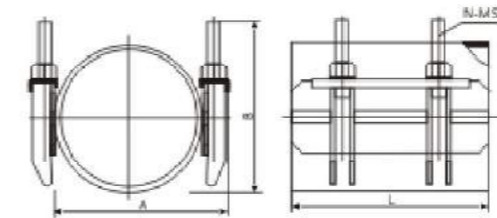

规格DIMENSIONS (PN 10/PN 16)

管道外径范围OD RANGE		L		A	B	N-MSXA(mm)			重量	
最小MIN	最大MAX	(mm)	(mm)	(mm)	(mm)	200	300	400	WEIGHT(kg)	
88	110	200	300	400	183	168	4-M16x175	6-M16x175	8-M16x175	2.63
108	128	200	300	400	201	177	4-M16x175	6-M16x175	8-M16x175	2.84
113	133	200	300	400	206	179	4-M16x175	6-M16x175	8-M16x175	2.94
120	140	200	300	400	213	183	4-M16x175	6-M16x175	8-M16x175	3.09
130	150	200	300	400	223	188	4-M16x175	6-M16x175	8-M16x175	3.05
140	160	200	300	400	233	193	4-M16x175	6-M16x175	8-M16x175	3.15
150	170	200	300	400	243	198	4-M16x175	6-M16x175	8-M16x175	3.26
159	180	200	300	400	253	203	4-M16x175	6-M16x175	8-M16x175	3.31
168	189	200	300	400	262	207	4-M16x175	6-M16x175	8-M16x175	3.36
170	190	200	300	400	263	208	4-M16x175	6-M16x175	8-M16x175	3.41
175	195	200	300	400	268	210	4-M16x175	6-M16x175	8-M16x175	3.44
190	210	200	300	400	283	225	4-M16x175	6-M16x175	8-M16x175	3.57
205	225	200	300	400	298	240	4-M16x175	6-M16x175	8-M16x175	3.85
210	230	200	300	400	303	245	4-M16x175	6-M16x175	8-M16x175	3.90
216	238	200	300	400	311	253	4-M16x175	6-M16x175	8-M16x175	3.95
220	242	200	300	400	315	257	4-M16x175	6-M16x175	8-M16x175	3.97
240	260	200	300	400	333	275	4-M16x175	6-M16x175	8-M16x175	4.15
243	263	200	300	400	336	278	4-M16x175	6-M16x175	8-M16x175	4.20
255	275	200	300	400	348	290	4-M16x175	6-M16x175	8-M16x175	4.31
272	292	200	300	400	365	307	4-M16x175	6-M16x175	8-M16x175	4.42
282	302	200	300	400	375	317	4-M16x175	6-M16x175	8-M16x175	4.52
295	315	200	300	400	388	330	4-M16x175	6-M16x175	8-M16x175	4.62
307	327	200	300	400	400	342	4-M16x175	6-M16x175	8-M16x175	4.73
315	335	200	300	400	408	350	4-M16x175	6-M16x175	8-M16x175	4.83
319	339	200	300	400	412	354	4-M16x175	6-M16x175	8-M16x175	4.88
322	344	200	300	400	417	359	4-M16x175	6-M16x175	8-M16x175	4.94
333	353	300	400	426	368		6-M16x175	8-M16x175	8-M16x175	8.27
341	361	300	400	434	376		6-M16x175	8-M16x175	8-M16x175	8.38
365	385	200	400	458	400		6-M16x175	8-M16x175	8-M16x175	8.58
396	416	300	400	489	431		6-M16x175	8-M16x175	8-M16x175	8.73
410	430	300	400	503	445		6-M16x175	8-M16x175	8-M16x175	8.89